

GENIE GS-2668RT




MEASUREMENTS		METRIC	IMPERIAL
Working height maximum*		9.80 m	32 ft 2 in
A	Platform height maximum	7.92 m	26 ft
B	Platform height stowed	1.19 m	3 ft 11 in
Platform dimensions (length x width)			
C x D	Standard	2.51 m x 1.55 m	8 ft 3 in x 5 ft 1 in
	Standard with extension	3.73 m x 1.55 m	12 ft 3 in x 5 ft 1 in
Slide-out platform extension deck		1.22 m	4 ft
Toeboard height		15 cm	6 in
E	Height - stowed	2.35 m	7 ft 9 in
	Height - stowed: rails folded	1.73 m	5 ft 8 in
F	Length - stowed / extended	3.40 m / 4.10 m	11 ft 2 in / 13 ft 5 in
G	Width	1.75 m	5 ft 9 in
H	Wheelbase	1.85 m	6 ft 1 in
I	Ground clearance - centre	19 cm	7 in

PRODUCTIVITY		
Platform capacity	567 kg	1,250 lb
Slide-out platform extension deck capacity	136 kg	299 lb
Maximum number of persons	4	4
Maximum wind speed (12.5 m/s)	45 km/h	28 mph
Drive speed - stowed	6.1 km/h	3.8 mph
Drive speed - raised	0.8 km/h	0.49 mph
Gradeability**	40%	21.80°
Maximum outrigger levelling - front to back	6.6°	6.6°
Maximum outrigger levelling - side to side	10.6°	10.6°
Inside turning radius	1.52 m	5 ft
Outside turning radius	3.68 m	12 ft 1 in
Raise / lower speed	30 / 35 sec	30 / 35 sec
Controls	proportional	proportional
Drive	four wheel	four wheel
Tyres - rough terrain NHS	26x12D380	26x12D380
Wheel load maximum***	934 kg	2,059 lb
Axle load maximum***	1,868 kg	4,118 lb
Localised pressure per tyre***	6.04 kg/cm ² (592 kPa)	86 psi
Occupied floor pressure***	806 kg/m ² (7.91 kPa)	165 psf

POWER		
Power source	Kubota diesel 15 kW (20 hp)	
Fuel tank capacity	56.8 L	15 gal lqd
Hydraulic system capacity	62.5 L	16.51 gal lqd

WEIGHT****		
	3,454 kg	7,614 lb

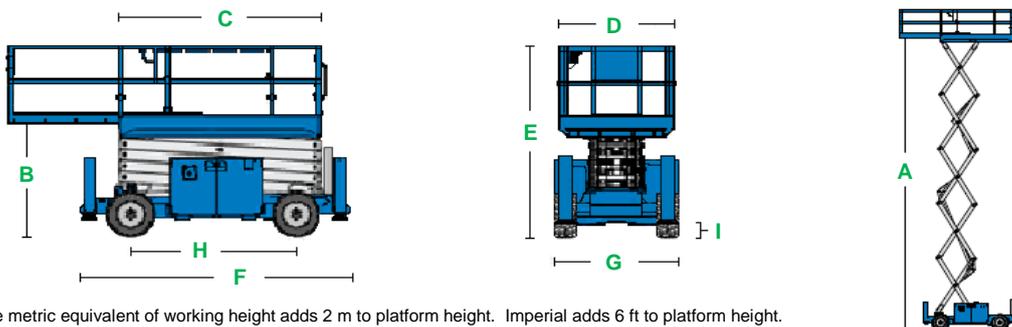

*The metric equivalent of working height adds 2 m to platform height. Imperial adds 6 ft to platform height.
 **Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.
 ***Floor loading information is approximate. It should be used only with adequate safety factors.
 ****Weight will vary depending on options.