

JLG 2630ES




MEASUREMENTS		METRIC	IMPERIAL
Working height maximum*		9.75 m	32 ft
Platform height maximum		7.75 m	26 ft in
Platform height lowered		1.23 m	4 ft
Platform dimensions (length x width)			
A x B	Standard	2.30 x 0.76 m	7 ft 7 in x 2 ft 6 in
C x B	Standard with extension	3.20 x 0.76 m	10 ft 6 in x 2 ft 6 in
Slide-out platform extension deck		0.90 m	3 ft
D	Height - stowed	2.33 m	7 ft 8 in
	Height - stowed: rails folded	1.94 m	6 ft 4 in
E	Length - stowed	2.30 m	7 ft 7 in
F	Width	0.765 m	2 ft 6 in
G	Wheelbase	1.90 m	6 ft 3 in
H	Ground clearance	9 cm	4 in
	- with pothole guards deployed	2 cm	1 in

PRODUCTIVITY		
Platform capacity	230 kg	507 lb
Maximum number of persons - indoor / outdoor use	2 / 0	2 / 0
Drive speed - raised	0.8 km/h	0.49 mph
Gradeability**	25%	14.04°
Inside turning radius	zero	zero
Outside turning radius	2.06 m	6 ft 9 in
Raise / lower speed	40 sec / 40 sec	40 sec / 40 sec
Controls	proportional	proportional
Tyres - solid non-marking	40.6 x 12.5 cm	16 x 5 in
Wheel load maximum***	832 kg	1,834 lb
Ground bearing pressure***	6.3 kg/cm ² (618 kPa)	90 psi

POWER		
Power source	48 V DC (four 6 V 225 Amp h batteries)	
Hydraulic tank capacity	7.6 L	2 gal lqd

WEIGHT****		
	2,231 kg	4,918 lb

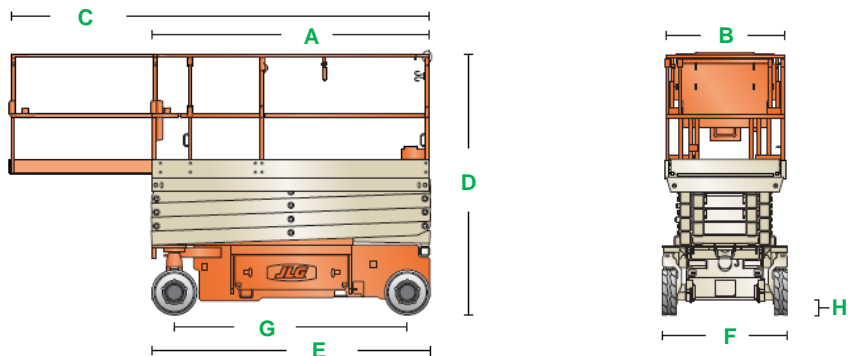

*The metric equivalent of working height adds 2 m to platform height. Imperial adds 6 ft to platform height.

**Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.

***Floor loading information is approximate. It should be used only with adequate safety factors.

****Weight will vary depending on options.