

# SNORKEL SR3370




| MEASUREMENTS                         |                               | METRIC          | IMPERIAL                |
|--------------------------------------|-------------------------------|-----------------|-------------------------|
| Working height maximum*              |                               | 12.12 m         | 39 ft 9 in              |
| <b>A</b>                             | Platform height maximum       | 10.12 m         | 33 ft 2 in              |
| Platform dimensions (length x width) |                               |                 |                         |
| <b>B x C</b>                         | Standard                      | 2.73 m x 1.65 m | 8 ft 11 in x 5 ft 5 in  |
|                                      | Standard with extension       | 3.93 m x 1.65 m | 12 ft 11 in x 5 ft 5 in |
| Slide-out platform extension deck    |                               | 1.20 m          | 4 ft                    |
| Guardrail height                     |                               | 1.10 m          | 3 ft 7 in               |
| Toeboard height                      |                               | 15 cm           | 6 in                    |
| <b>D</b>                             | Height - stowed               | 2.73 m          | 8 ft 11 in              |
|                                      | Height - stowed: rails folded | 2 m             | 6 ft 7 in               |
| <b>E</b>                             | Length - stowed               | 3.36 m          | 11 ft                   |
|                                      | Length - extended             | 4.28 m          | 14 ft                   |
| <b>F</b>                             | Width                         | 1.78 m          | 5 ft 10 in              |
| <b>G</b>                             | Wheelbase                     | 2 m             | 6 ft 7 in               |
| <b>H</b>                             | Ground clearance - centre     | 30 cm           | 12 in                   |

| PRODUCTIVITY                                |  | METRIC       | IMPERIAL     |
|---|--|--------------|--------------|
| Platform capacity                           |  | 450 kg       | 992 lb       |
| Slide-out platform extension deck capacity  |  | 120 kg       | 264 lb       |
| Maximum number of persons                   |  | 2            | 2            |
| Maximum wind speed (12.5 m/s)               |  | 45 km/h      | 28 mph       |
| Drive speed - below 2.40 m                  |  | 4.5 km/h     | 2.79 mph     |
| Drive speed - above 2.40 m                  |  | 0.35 km/h    | 0.21 mph     |
| Gradeability**                              |  | 35%          | 19.29°       |
| Maximum outrigger levelling - front to back |  | 6°           | 6°           |
| Maximum outrigger levelling - side to side  |  | 10°          | 10°          |
| Inside turning radius                       |  | 2.38 m       | 7 ft 10 in   |
| Outside turning radius                      |  | 4.75 m       | 15 ft 7 in   |
| Raise / lower speed                         |  | 50 / 60 sec  | 50 / 60 sec  |
| Exit / entry angle                          |  | 35%          | 19.29°       |
| Controls                                    |  | proportional | proportional |
| Axle  |  | articulating | articulating |
| Drive                                       |  | four wheel   | four wheel   |
| Tyres - poly filled loader lug NHS          |  | 27x10.50-15  | 27x10.50-15  |
| Wheel load maximum***                       |  | 1,015 kg     | 2,237 lb     |

| POWER        |                      |
|--------------|----------------------|
| Power source | Kubota diesel engine |

| WEIGHT**** |                   |
|------------|-------------------|
|            | 3,620 kg 7,980 lb |

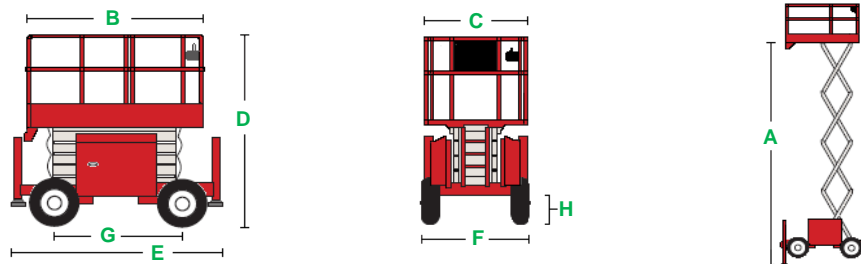

\*The metric equivalent of working height adds 2 m to platform height. Imperial adds 6 ft to platform height.  
 \*\*Gradeability applies to driving on slopes. See operator's manual for details regarding slope rating.  
 \*\*\*Floor loading information is approximate. It should be used only with adequate safety factors.  
 \*\*\*\*Weight will vary depending on options.